

HERMES warning beacon / warning flashlight 12V DC, type: RBL 5




technical data:

| | |
|----------------------------|--|
| item number: | 11620 |
| part description: | warning beacon / warning flashlight, type RBL5 |
| housing: | top / cap: PC, shock-resistant bottom: ABS |
| available colours: | red / yellow / orange / green / blue / white |
| dimensions (d x h): | 110 mm x 135 mm |
| weight: | 280 g |
| protection: | IP54 |
| high flash power: | 5 Ws |
| flashing frequency:: | approximatly 1,1 Hz |
| lifetime of the flashtube: | 7 x 10 ⁷ flashes |
| mounting and installation: | upside, see installation instruction |
| cable entry: | seal for cable entry STE11 entry from the side or from the bottom |
| cable connector block: | screw terminal block, +/- und sabotage marked on the PCB |
| power supply: | 12 V DC |
| typ. current consumption: | 350 mA |
| temperature: | -20° bis + 70°C |
| marking: | |



RBL 5, here: signal color red

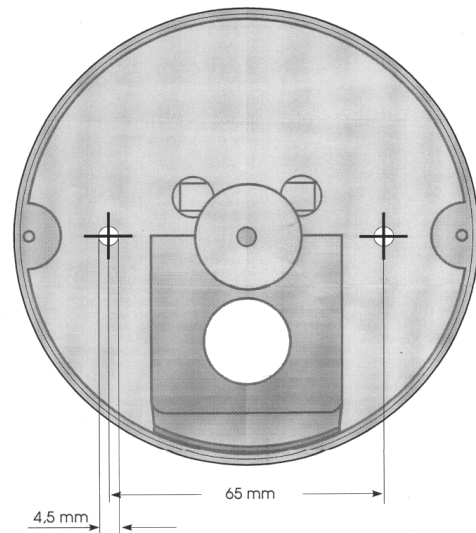

mounting drills at the bottom part