

LED warning beacon/ LED warning flashlight 11 to 26V DC, type: RLFW 13




technical data:

item number.:	11700
part description:	LED warning beacon, type RLFW 13
housing:	top / cap: Makrolon (PC), bottom: ABS
color:	red / orange / yellow / green / blue / white
dimensions (d x h):	110 mm x 135 mm
weight: (1 / 2 / 3 level):	195 g / 205 g / 215 g
protection:	IP65
lighting power (1 / 2 / 3 level):	12 / 24 /36 bright shining LED each with approx. 5000 mCd, a 360 degree light radiation
repetition frequency:	approx... 2 Hz
expected lifetime of LED *: <small>*) as specified by the LED-manufacturer</small>	$> 7 \times 10^7$ flashlight pulses*
mounting and installation:	upright, according to instruction leaflet
cable entry:	Seal for cable entry STE11 Entry from the side or from the bottom
Cable connector block:	WAGO connector for 1 wired or flexible cable with 0,8 upto 2,5 mm ² cross section
power supply:	11..26 V DC
load (1 / 2 / 3 level): according to power supply	0,5.. 1,5 Watt / 1.. 3 Watt /1,5.. 4,5 Watt
typ. current consumption (1 / 2 / 3 level):	42..70 mA / 84..140mA / 126..210mA
pulse current consumption (1 / 2 / 3 level) depending on the lighting effect :	333 / 666 / 999 mA
temperature:	-20° bis + 70°C
marking:	CE



RLFW 13, here: signal color red

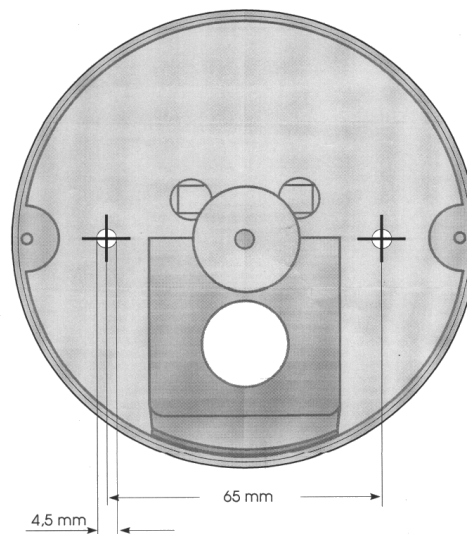

mounting drills at the bottom part