



Datasheet for Surveillance Control Panel Typ. ZAS-2020


→ Technical Data:

Article-No.	S0008219
Designation	ZAS-2020
Housing/Colour	Steel sheet, Grey (RAL-7012)
Sabotage monitoring	Lid contact
Dimensions (LxWxH) in mm	220x127x70
Weight (Without cylinder)	approx. 1,5kg
IP-Protection	IP20, Only for dry indoor rooms
Approved temperature range	0 to +70 °C
Operation voltage range	110 to 230V AC, (power supply) 110 to 230V AC (BUS voltage)
Power consumption	Max. 6VA
Volume Fire Alarm / Reminder signal	90dB / 3KHz 80dB / 4,1KHz
Number of participants	Up to 7 FWS-2020 devices
Connection terminals (power supply)	WAGO <i>picoMAX</i> ® (Max. 2,5mm², All Wiretypes)
Installation and Montage	Wallmounting
Cable entry	surface or flush mounting possible
Not included in the delivery kit	Half cylinder(30/10)
Included in the delivery kit	External power supply filter
Markings	  RoHS

→ More information about the installation and montage of our surveillance control panel ZAS2020 can be found in our assembly instructions and user manual



ZAS-2020

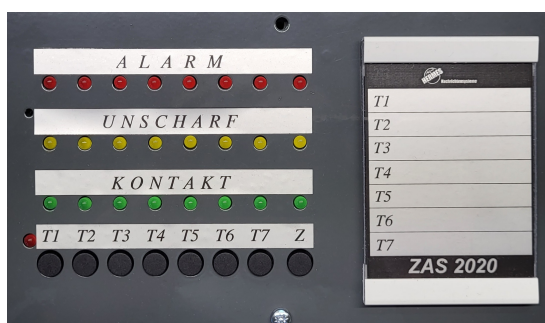

ZAS-2020 Control panel