




HERMES warning beacon / warning flashlight 12V DC, type: RBL 5

 technical data:

item number:	11625
part description:	warning beacon / warning flashlight, type RBL5
housing:	top / cap: PC, shock-resistant bottom: ABS
available colours:	red / yellow / orange / green / blue / white
dimensions (d x h):	110 mm x 135 mm
weight:	280 g
protection:	IP54
sabotage protection:	magnetic contact
high flash power:	5 Ws
flashing frequency:	approximatly 1,1 Hz
lifetime of the flashtube:	7 x 10 ⁷ flashes
mounting and installation:	upside, see installation instruction
cable entry:	seal for cable entry STE11 entry from the side or from the bottom
cable connector block:	solder terminal block or screw terminal block, +/- und sabotage marked on the PCB
power supply:	12 V DC
typ. current consumption:	350 mA
max. supply current at power up:	1A
temperature:	-20° bis + 70°C
marking:	  12V DC G184122



RBL 5, here: signal color red

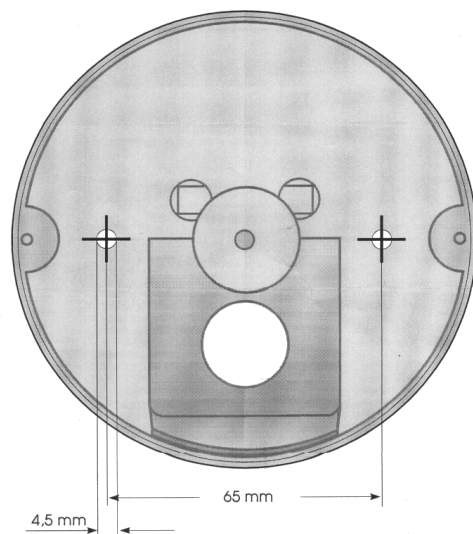

mounting drills at the bottom part